

**Characteristics**

The pilot operated proportional directional valves D\*1FB are available in 4 sizes:

- D31FB - NG10 (CETOP 05)
- D41FB - NG16 (CETOP 07)
- D91FB - NG25 (CETOP 08)
- D111FB - NG32 (CETOP 10)

The valves are available with and without onboard electronics (OBE).

**D\*1FB OBE**

The digital onboard electronics is situated in a robust metal housing, which allows the usage under rough environmental conditions.

The nominal values are factory set. The cable connection to a serial RS232 interface is available as accessory.

**D\*1FB for external electronics**

The parameters can be saved, changed and duplicated in combination with the digital power amplifier PWD00A-400. The valve parameters can be edited with the common ProPxD software for both versions.

The D\*1FB valves work with barometric feedback of the main stage to the pressure reducing pilot valve. The pilot control pressure of 25 bar allows high flow rates at maximum stability.


The innovative integrated regenerative function into the A-line (optional) allows energy saving circuits for differential cylinders. The hybrid version can be switched between regenerative mode and standard mode at any time.

Valves with explosion proof solenoids EEx me II see catalogue HY11-3343.


Download: [www.parker.com/euro\\_hcd](http://www.parker.com/euro_hcd) - see "Literature"




D91FB OBE



Standard D\*1FB OBE



A-regeneration D\*1FBR OBE




Hybrid D\*1FBZ OBE

**Technical Features**

- Progressive flow characteristics for sensitive adjustment of flow rate
- High flow capacity
- Digital onboard electronics optional
- Centre position monitoring optional
- Energy saving A-regeneration optional
- Switchable hybrid version optional



**Further literature about the opportunities of energy savings and more functional details of the integrated regeneration is available on request.**

**D91FB OBE**


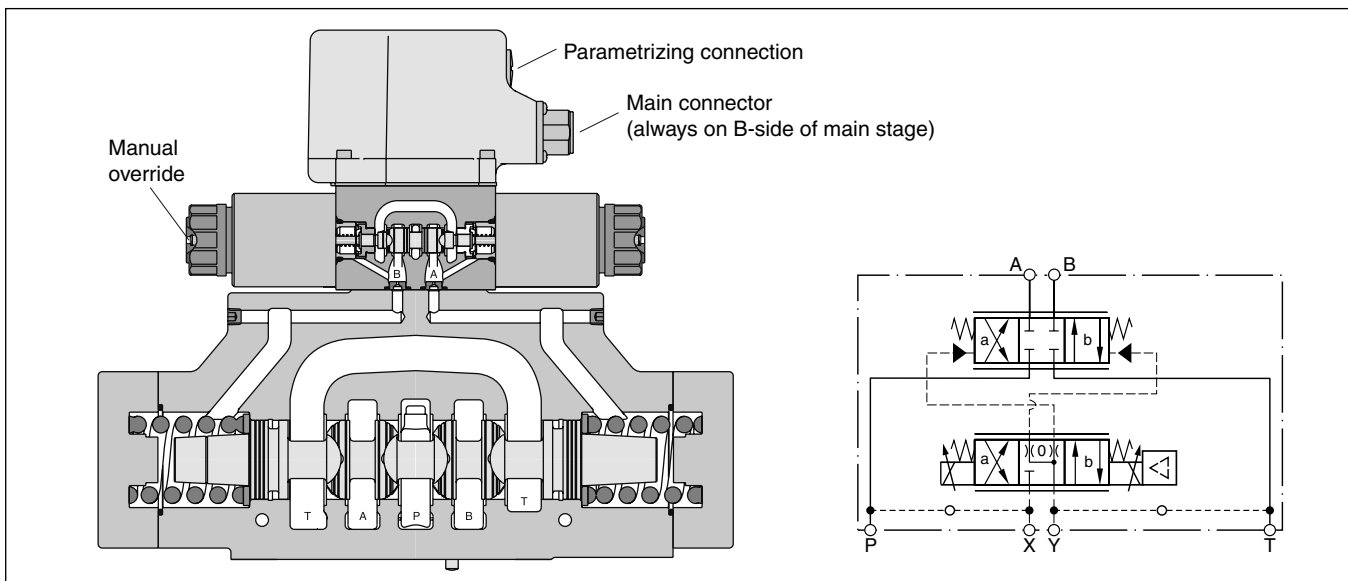


**D\*1FBR and D\*1FBZ**


**Regenerative valve D\*1FBR**

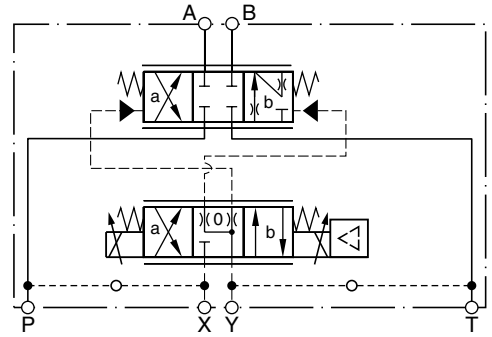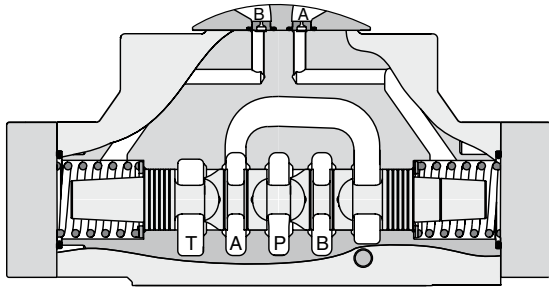


**Hybrid valve D\*1FBZ**

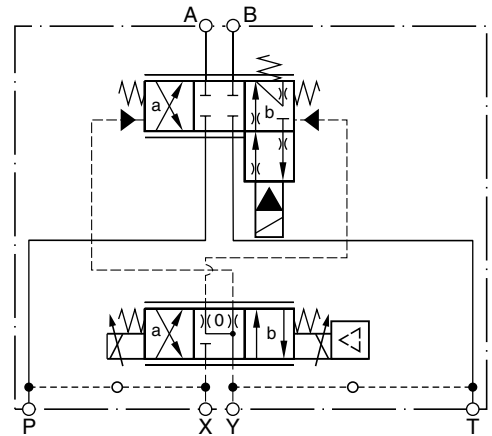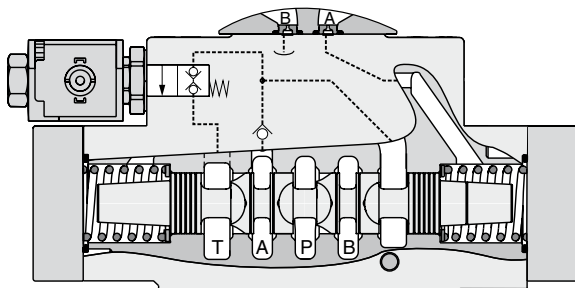


**D\*1FBR (regenerative valve)**  
 Cylinder extending

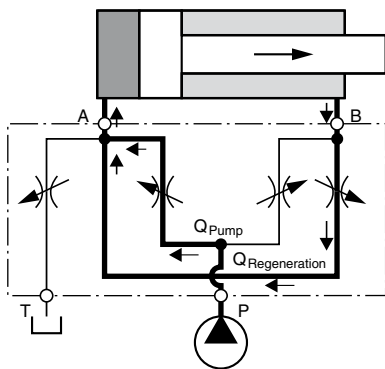

**D\*1FBZ (hybrid valve)**  
 Cylinder extending  
 regenerative mode  
 (high speed)

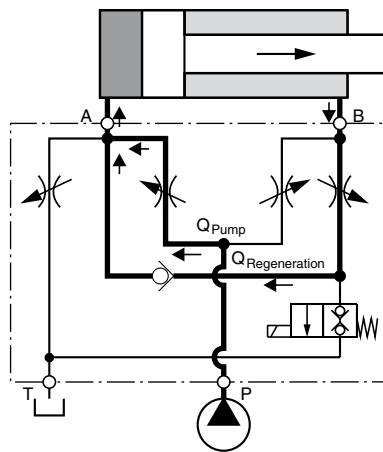

Cylinder extending  
 standard mode  
 (high force)

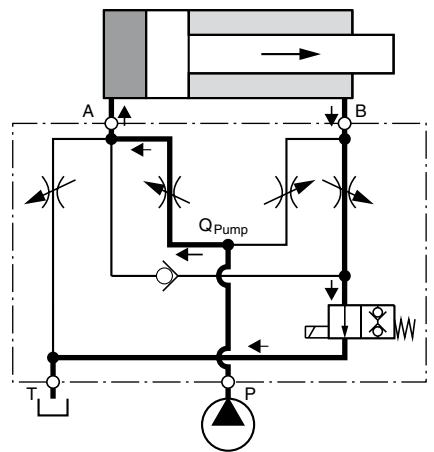


**Flow rate in % of nominal flow**

Size <sup>1)</sup>	spool	Port					
		A-T	P-A	P-B	B-A (R-valve)	B-A (hybrid)	B-T (hybrid)
D41FBR/Z	31/32	100 %	50 %	100 %	50 %	45 %	20 %
D91FBR/Z	31/32	100 %	50 %	100 %	50 %	50 %	25 %
D111FBR/Z	31/32	100 %	50 %	100 %	50 %	50 %	20 %

<sup>1)</sup> D31FB: For size NG10 please refer solution with sandwich- and adaptor plates "A10-1664 / A10-1665L / H10-1662 / H10-1666L" in chapter 12.

**D\*1FB**

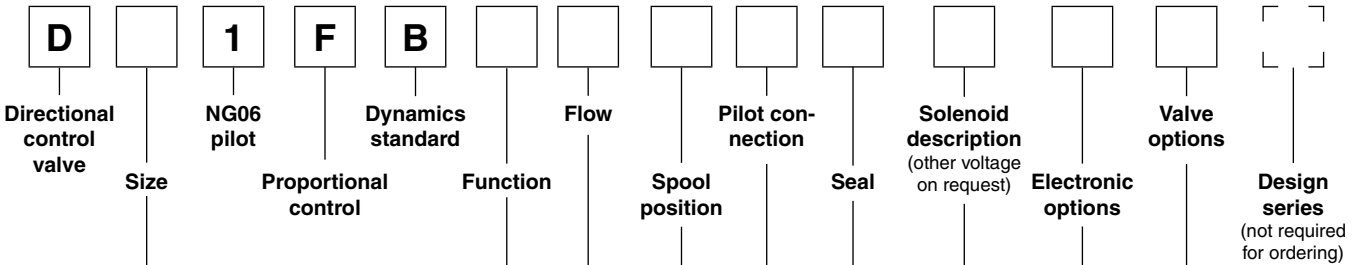

**3**

Code	Nominal size
3	NG10 / CETOP 05
4	NG16 / CETOP 07
9 <sup>1)</sup>	NG25 / CETOP 08
11	NG32 / CETOP 10

Standard		NEW: Regenerative function <sup>2)</sup>		NEW: Hybrid function <sup>2) 3)</sup>	
Code	Spool type	Code	Spool type	Code	Spool type
E01					
E02					
B31	$Q_B = Q_A / 2$ 	R31		Z31	
B32	$Q_B = Q_A / 2$ 	R32		Z32	

Code	Flow [l/min] at $\Delta p = 5$ bar per metering edge			
	D31	D41	D91	D111
B	—	100 <sup>4) 5)</sup>	—	—
C	75 <sup>5)</sup>	130 <sup>4) 5)</sup>	—	—
D	90 <sup>5)</sup>	—	—	—
E	120	—	250 <sup>4) 5)</sup>	—
F	—	200	—	—
H	—	—	400	—
L	—	—	—	1000

Code	Valve options
0	Standard for spool type B, E, R
8 <sup>9) 10)</sup>	Monitor switch
L <sup>8)</sup>	Hybrid valve 24 V normally closed for spool type Z

Code	Electronic options
W <sup>6)</sup>	EN 175301-803
J <sup>6) 7)</sup>	DT04-2P "Deutsch"

Code	Solenoid voltage
J	24 V/1,1A
K	12 V/2,5A


Code	Seal
N	NBR
V	FPM

Code	Inlet	Drain
1	Internal	External
2	External	External
4	Internal	Internal
5	External	Internal

Code	Design
C	
E	
K	


Short delivery time for all variations

<sup>1)</sup> With enlarged connections Ø 32 mm.  
<sup>2)</sup> For regenerative and hybrid function at D31FB (NG10) please refer solutions with sandwich - and adaptor plates "A10-1664 / A10-1665L / H10-1662 / H10-1666L" in chapter 12.



<sup>3)</sup> Not for D31FB.  
<sup>4)</sup> Not for spool type B31 und B32.  
<sup>5)</sup> Not for regenerative and hybrid function.  
<sup>6)</sup> Please order plugs separately. See accessories.  
<sup>7)</sup> Not for hybrid function.  
<sup>8)</sup> See page "regenerative and hybrid function" (not for D31FB).  
<sup>9)</sup> Not for D111FBZ".  
<sup>10)</sup> Monitor switch for hybrid valves: code 8 includes options of code L (24 V normally closed)


**D\*1FB OBE**

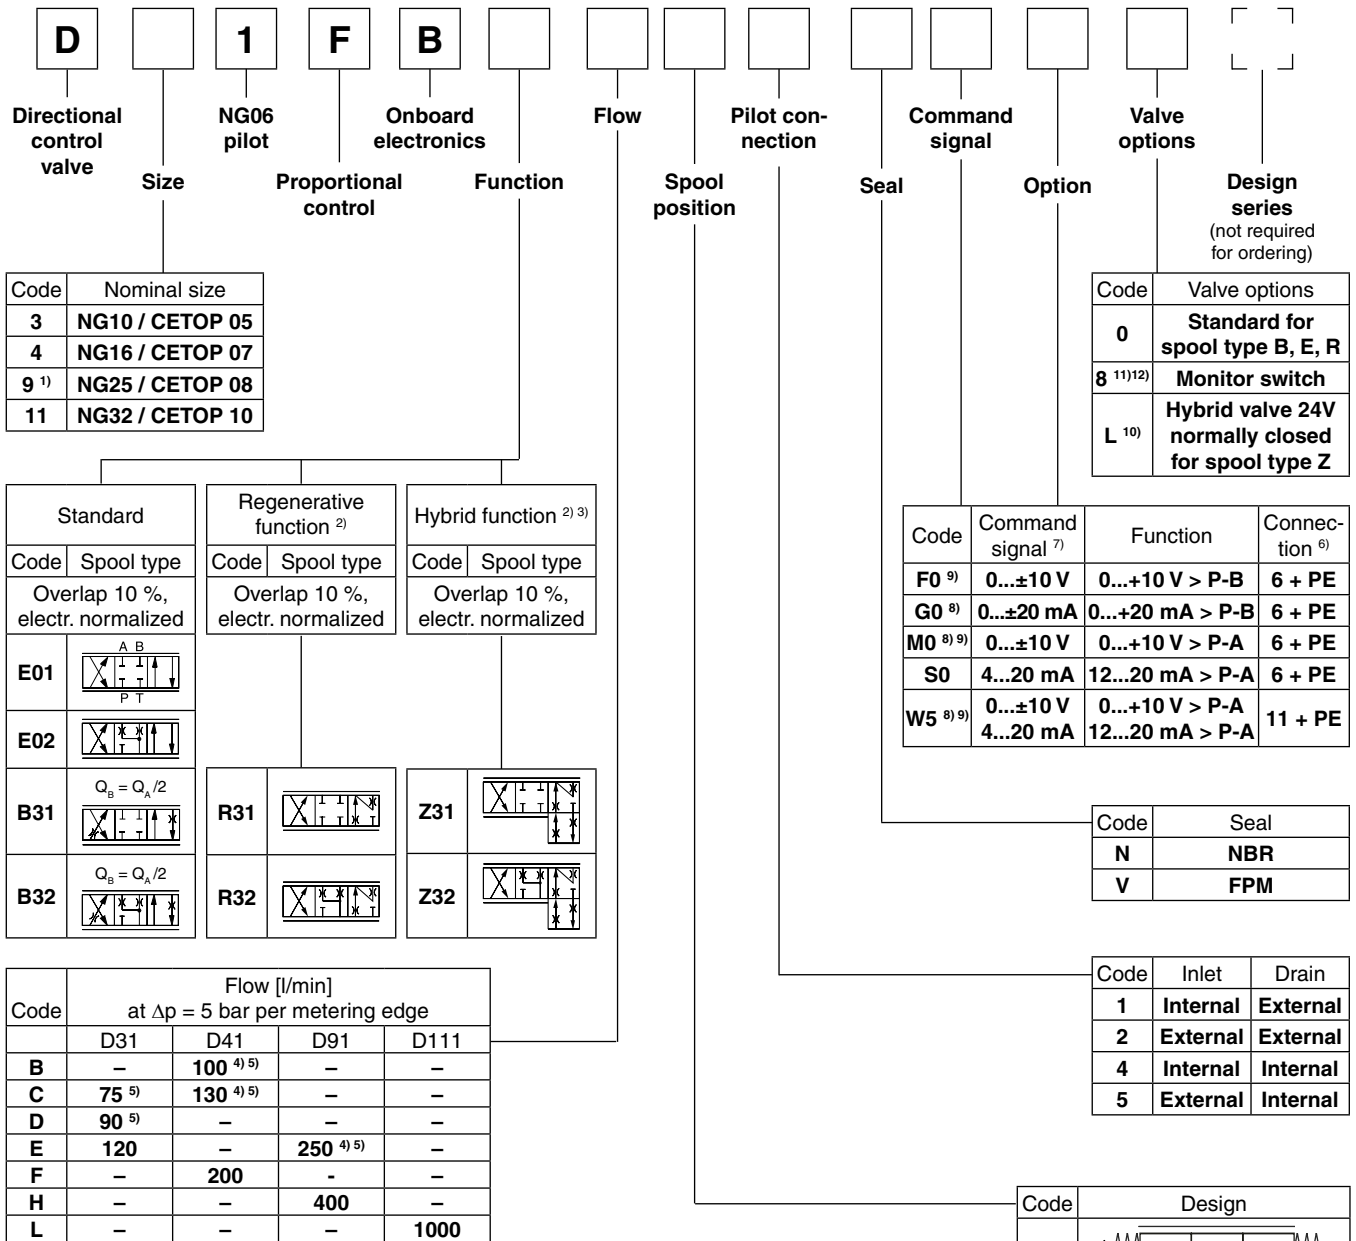

Parametrizing cable OBE →  
 RS232, item no. 40982923

Short delivery time  
 for all variations

<sup>1)</sup> With enlarged connections Ø 32 mm.  
<sup>2)</sup> For regenerative and hybrid function at D31FB (NG10) please refer solutions with sandwich - and adaptor plates "A10-1664 / A10-1665L / H10-1662 / H10-1666L" in chapter 12.



<sup>3)</sup> Not for D31FB.  
<sup>4)</sup> Not for spool type B31 und B32.  
<sup>5)</sup> Not for regenerative and hybrid function.  
<sup>6)</sup> Please order plugs separately, see accessories .  
<sup>7)</sup> For 1 solenoid 0...+10 V respectively 4...20 mA.  
<sup>8)</sup> Not for spool position E and K.  
<sup>9)</sup> F0, M0 potentiometer supply, W5 command channel & potentiometer supply.  
<sup>10)</sup> See page "regenerative and hybrid function" (not for D31FB).  
<sup>11)</sup> Not for D111FBZ".  
<sup>12)</sup> Monitor switch for hybrid valves: code 8 includes options of code L (24 V normally closed)

3

<b>General</b>				
Design	Pilot operated DC valve			
Actuation	Proportional solenoid			
Size	NG10 (CETOP 05)	NG16 (CETOP 07)	NG25 (CETOP 08)	NG32 (CETOP 10)
Mounting interface	DIN 24340 / ISO 4401 / CETOP RP121 / NFPA			
Mounting position	unrestricted			
Ambient temperature	[°C]	-20...+60		
MTTF <sub>D</sub> value <sup>1)</sup>	[years]	75		
Weight (OBE)	[kg]	8.6 (9.3)	11.9 (12.6)	20.4 (21.1)
Vibration resistance	[g]	10 Sinus 5...200 Hz acc. IEC 68-2-6		
		30 Random noise 20...20 Hz acc. IEC 68-2-36		
		15 Shock acc. IEC 68-2-27		
<b>Hydraulic</b>				
Max. operating pressure	[bar]	Pilot drain internal: P, A, B, X 350; T, Y 185 (NG10: T, Y 15)		
	[bar]	Pilot drain external: P, A, B, T, X 350; Y 185 (NG10: Y 15)		
Fluid	Hydraulic oil according to DIN 51524 ... 535, other on request			
Fluid temperature	[°C]	-20...+60 (NBR: -25...+60)		
Viscosity permitted	[cSt] / [mm <sup>2</sup> /s]	20...400		
	recommended	[cSt] / [mm <sup>2</sup> /s]	30...80	
Filtration	ISO 4406 (1999); 18/16/13			
Nominal flow	[l/min]	75/90/120	130/200	250/400
at Δp=5 bar per control edge <sup>2)</sup>				
Leakage at 100 bar	[ml/min]	100	200	600
Overlap with OBE	[%]	electrically normalized at 10 (see flow characteristics)		
Pilot supply pressure	[bar]	min. 30 (+ T/Y pressure)		
	[bar]	max. 350		
	[bar]	optimal dynamics at 50		
Pilot flow at 100 bar	[l/min]	<0.5	<1.2	<1.2
Pilot flow, step response	[l/min]	2.0	1.9	4.5
				18
<b>Static / Dynamic</b>				
Step response at 100 % step	[ms]	50	75	100
Hysteresis	[%]	<5		
<b>Electrical characteristics</b>				
Duty ratio	[%]	100 ED; CAUTION: Coil temperature up to 150 °C possible		
Protection class	Standard (as per EN175301-803) IP65 in accordance with EN 60529 DT04-2P "Deutsch" IP69K (with correctly mounted plug-in connector)			
Solenoid	Code	K	J	
Supply voltage	[V]	12	24	
Current consumption	[A]	2.5	1.1	
Resistance	[Ohm]	4.4	18.6	
Solenoid connection	Connector as per EN 175301-803 (code W), DT04-2P "Deutsch" connector (code J). Solenoid identification as per ISO 9461.			
Wiring min.	[mm <sup>2</sup> ]	3x1.5 (AWG 16) overall braid shield		
Wiring length max.	[m]	50		

<sup>1)</sup> If valves with onboard electronics are used in safety-related parts of control systems, in case the safety function is requested, the valve electronics voltage supply is to be switched off by a suitable switching element with sufficient reliability.

<sup>2)</sup> Flow rate for different Δp per control edge:

$$Q_x = Q_{Nom.} \cdot \sqrt{\frac{\Delta p_x}{\Delta p_{Nom.}}}$$

**Technical Data / Characteristic Curves**

**3**

Electrical characteristics (D*1FB OBE)		
Duty ratio	[%]	100 ED; CAUTION: coil temperature up to 150 °C possible
Protection class		IP65 in accordance with EN 60529 (with correctly mounted plug-in connector)
Supply voltage/ripple DC	[V]	18...30, ripple < 5 % eff., surge free
Current consumption max.	[A]	2.0
Pre fusing medium lag	[A]	2.5
Input signal voltage		
Codes F0, M0, W5	[V]	+10...0...-10, ripple < 0.01 % eff., surge free, Ri = 100 kOhm
Code G0	[V]	+20...0...-20, ripple < 0.01 % eff., surge free, Ri = 200 Ohm
Codes S0 & W5 current	[mA]	4...12...20, ripple < 0.01 % eff., surge free, Ri = 200 Ohm < 3.6 mA = enable off, > 3.8 mA = enable on (acc. to NAMUR NE43)
Differential input max.		
Codes F0, M0 G0 & S0	[V]	30 for terminal D and E against PE (terminal G)
	[V]	11 for terminal D and E against 0V (terminal B)
Code W5	[V]	30 for terminal 4 and 5 against PE (terminal PE)
	[V]	11 for terminal 4 and 5 against 0V (terminal 2)
Channel recall signal	[V]	0...2.5: off / 5...30: on / Ri = 100 kOhm
Adjustment ranges		
Min	[%]	0...50
Max	[%]	50...100
Ramp	[s]	0...32.5
Interface		RS 232, parametrizing connection 5pole
EMC		EN 61000-6-2, EN 61000-6-4
Central connection		
Codes F0, M0 G0 & S0		6 + PE acc. to EN 175201-804
Code W5		11 + PE acc. to EN 175201-804
Wiring min.		
Codes F0, M0 G0 & S0	[mm <sup>2</sup> ]	7 x 1.0 (AWG16) overall braid shield
Code W5	[mm <sup>2</sup> ]	11 x 1.0 (AWG16) overall braid shield
Wiring length max.		50

**Electrical characteristics hybrid option**


Duty ratio	[%]	100 ED; CAUTION: Coil temperature up to 150 °C possible		
Protection class		IP 65 in accordance with EN 60529 (with correctly mounted plug-in connector)		
Supply voltage	[V]	<b>D41</b>	<b>D91</b>	<b>D111</b>
Tolerance supply voltage	[%]	±10	±10	±10
Current consumption	[A]	1.21	0.96	1.29
Power consumption	[W]	29	23	31
Solenoid connection		Connector as per EN 175301-803		
Wiring min.	[mm <sup>2</sup> ]	3 x 1.5 recommended		
Wiring length max.	[m]	50 recommended		

With electrical connections the protective conductor (PE ↓) must be connected according to the relevant regulations.


**D\*1FB B/E Flow characteristics**

at Δp = 5 bar per metering edge

Spool code **E01/02**

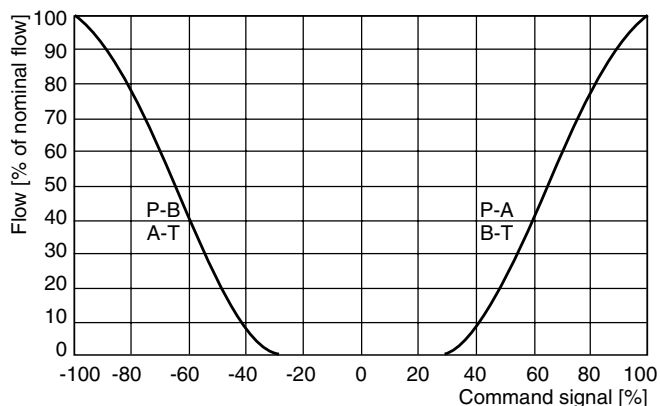

Spool code **B31/32\***

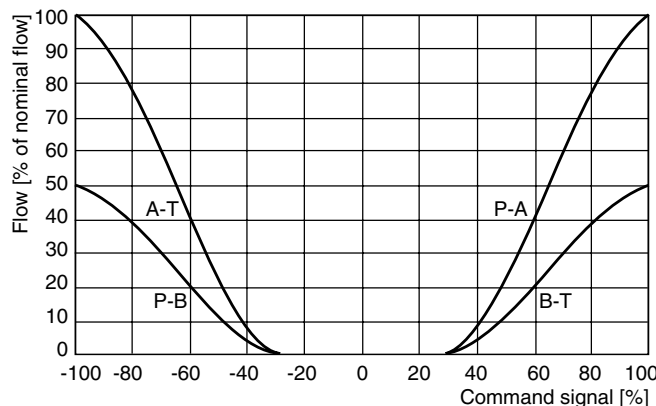


All characteristic curves measured with HLP46 at 50 °C.

**D\*1FB B/E OBE**


**Flow characteristics**

(Electrically set to opening point 10 %)  
 at  $\Delta p = 5$  bar per metering edge

Spool code **E01/02**

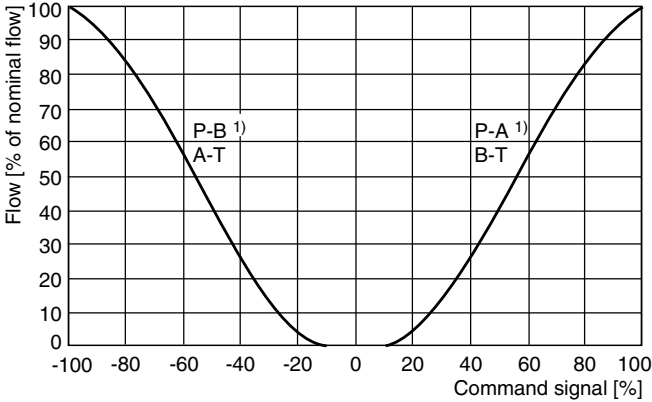


Spool code **B31/32**

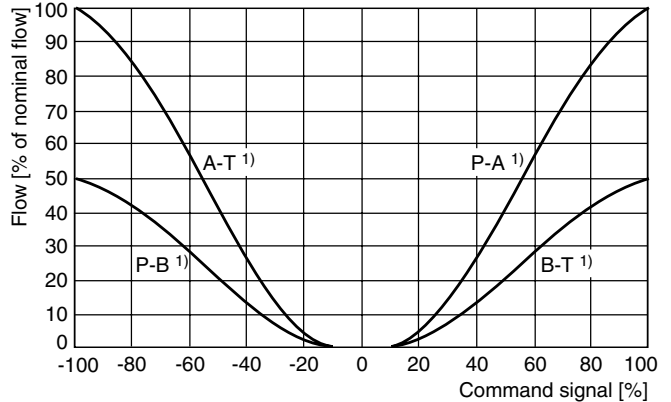

**D\*1FB R/Z (regenerative and hybrid)**


**D41FB R/Z**

Spool code **R/Z31/32**

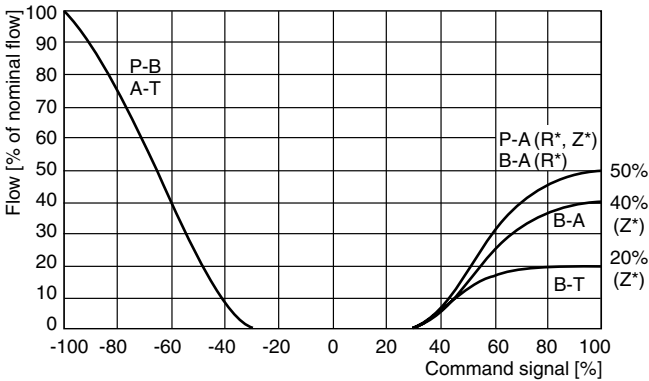

**D91FB R/Z**


Spool code **R/Z31/32**

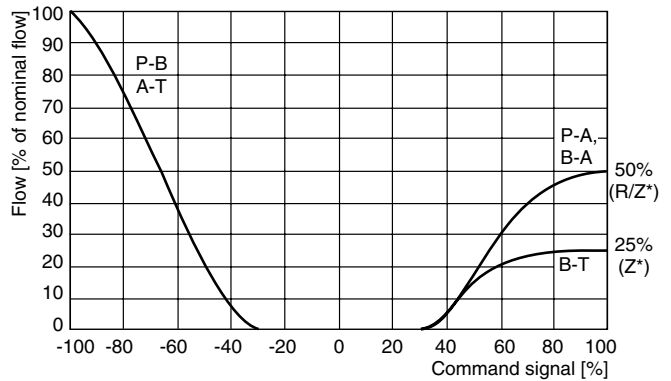

**D41FB R/Z OBE**


Spool code **R/Z31/32**

(electrically set to opening point 10 %)

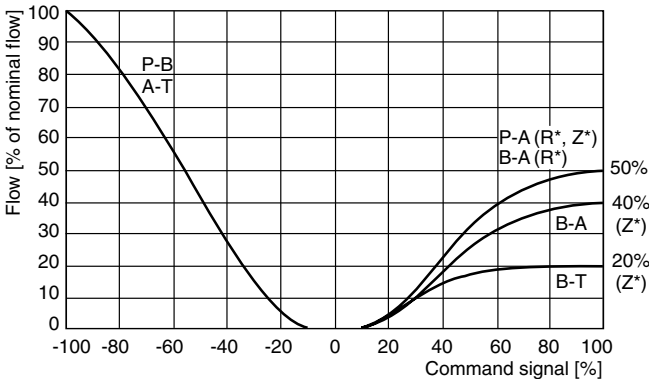

**D91FB R/Z OBE**

Spool code **R/Z31/32**

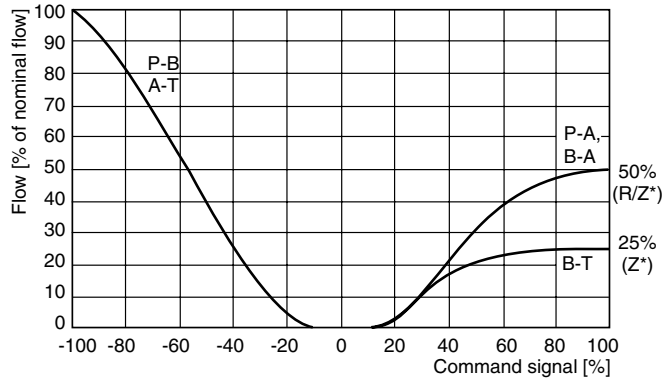


All characteristic curves measured with HLP46 at 50 °C.


<sup>1)</sup> Flow direction depending on ordering code.

3

**Monitor switch M12x1 pin assignment**



- 1 + Supply 18...42 V
- 2 output B (normally closed)
- 3 0V
- 4 output A (normally closed)
- 5 Earth ground

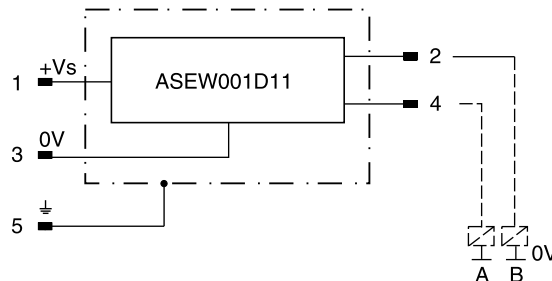

Signal	Output A (pin 4)	Output B (pin 2)
neutral	closed	closed
	open	closed
	closed	open

The neutral position is monitored. The signal changes after less than 10 % of the spool stroke.




**Electrical monitor switch**


Protection class		IP65 in accordance with EN 60529 (with correctly mounted plug-in connector)
Ambient temperature	[°C]	0-70
Supply voltage/ripple	[V]	18...42, ripple < 10 % eff.
Current consumption without load	[mA]	< 30
Max. output current per channel, ohmic	[mA]	400
Min. output load per channel, ohmic	[kOhm]	100
Max. output drop at 0.2 A	[V]	< 1.1
Max. output drop at 0.4 A	[V]	< 1.6
EMC		EN61000-6-2, EN61000-6-4
Max. tol. ambient field strength	[A/m]	1200
Min. distance to next AC solenoid	[m]	0.1
Interface		4+PE acc. IEC 61076-2-101 (M12)
Wiring min.	[mm²]	5 x 0.5 (AWG 20) overall braid shield
Wiring lenght max.	[m]	50




Code F0, M0  
 6 + PE acc. to EN 175201-804

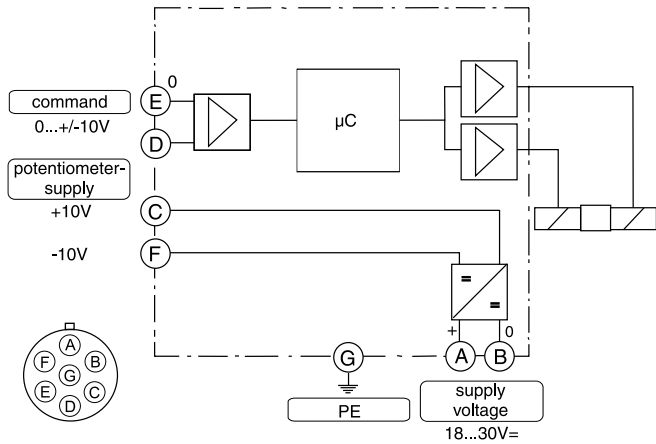

Code G0, S0  
 6 + PE acc. to EN 175201-804

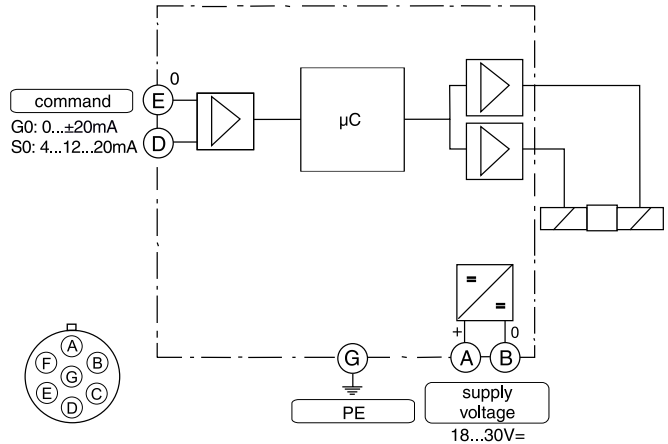

Code W5  
 11 + PE acc. to EN 175201-804

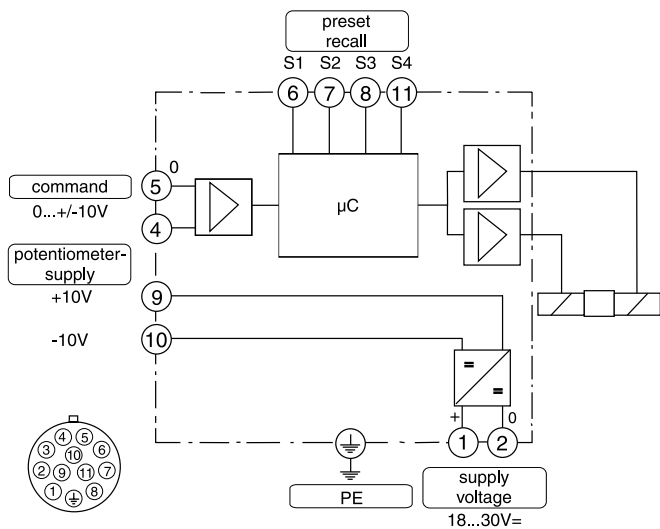

**ProPxD interface program**


The ProPxD software permits comfortable parameter setting for the module electronics. Via the clearly arranged entry mask the parameters can be noticed and modified. Storage of complete parameter sets is possible as well as printout or record as a text file for further documentation. Stored parameter sets may be loaded anytime and transmitted to other valves. Inside the electronics a non-volatile memory stores the data with the option for recalling or modification.

The PC software can be downloaded free of charge at [www.parker.com/euro\\_hcd](http://www.parker.com/euro_hcd) – see page “Support”.

**Features**

- Comfortable editing of all parameters
- Depiction and documentation of parameter sets
- Storage and loading of optimized parameter adjustments
- Executable with all actual Windows® operating systems from Windows® 95 upwards
- Plain communication between PC and electronics via serial interface RS-232


**The parametrizing cable may be ordered under item no.40982923.**

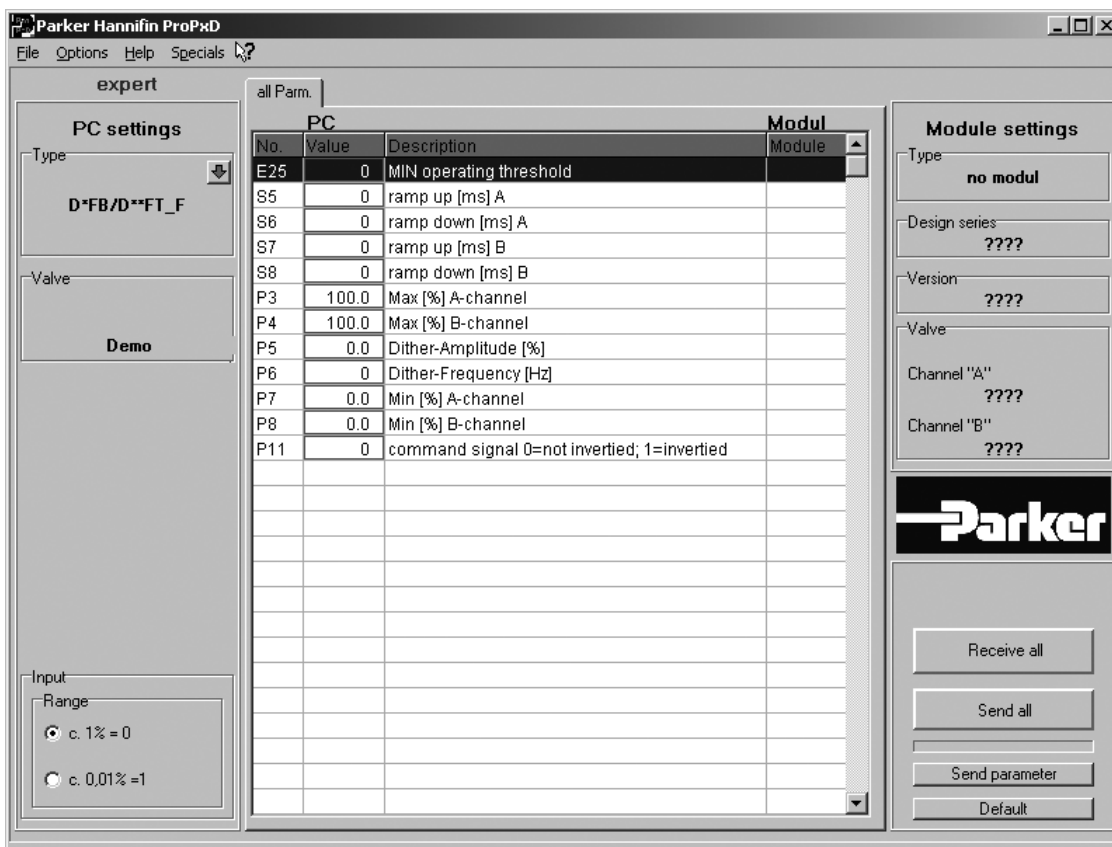

**Pilot oil inlet (supply) and outlet (drain)**


○ open, ● closed

Pilot oil		B	C
Inlet	Drain		
internal	external	○	●
external	external	●	●
internal	internal	○	○
external	internal	●	○




**3**


**D31FBB/E**

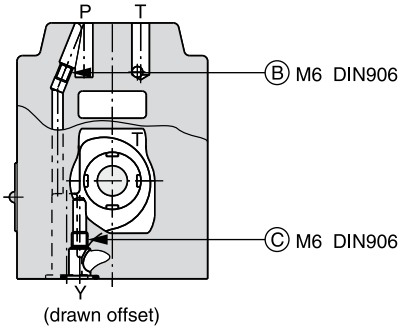


**D31FBR**

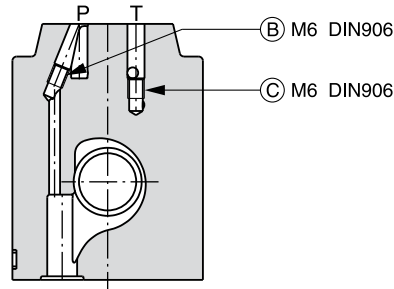


**D41FBB/E**

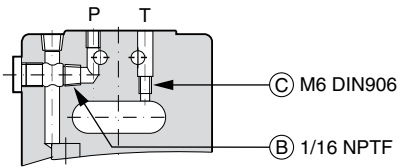


**D41FBR**

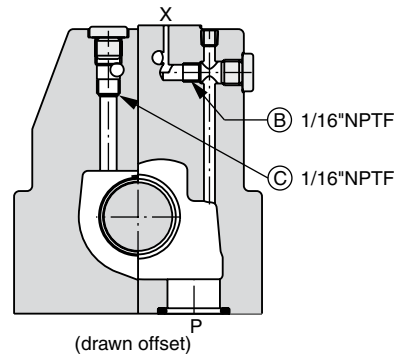


**D41FBZ**

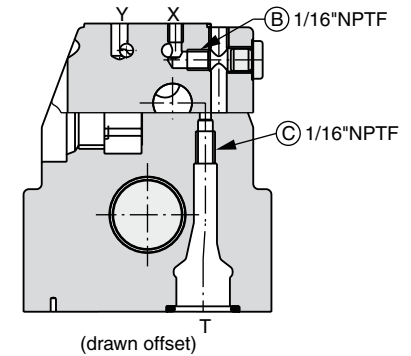


**D91FBB/E**

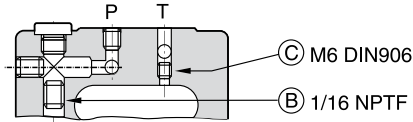


**D91FBR**

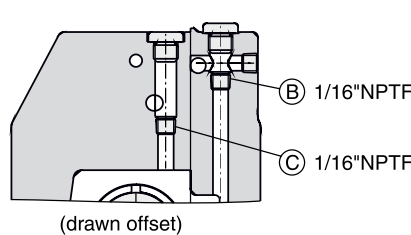


**D91FBZ**

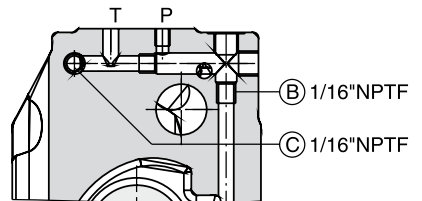


**D111FBB/E**

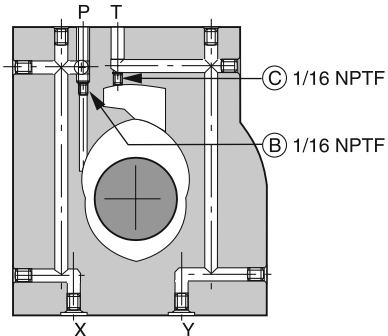


**D111FBR**

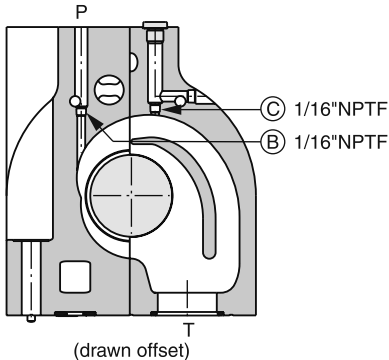

**D111FBZ**

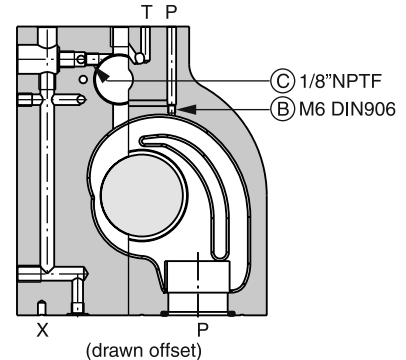


**D31FB**

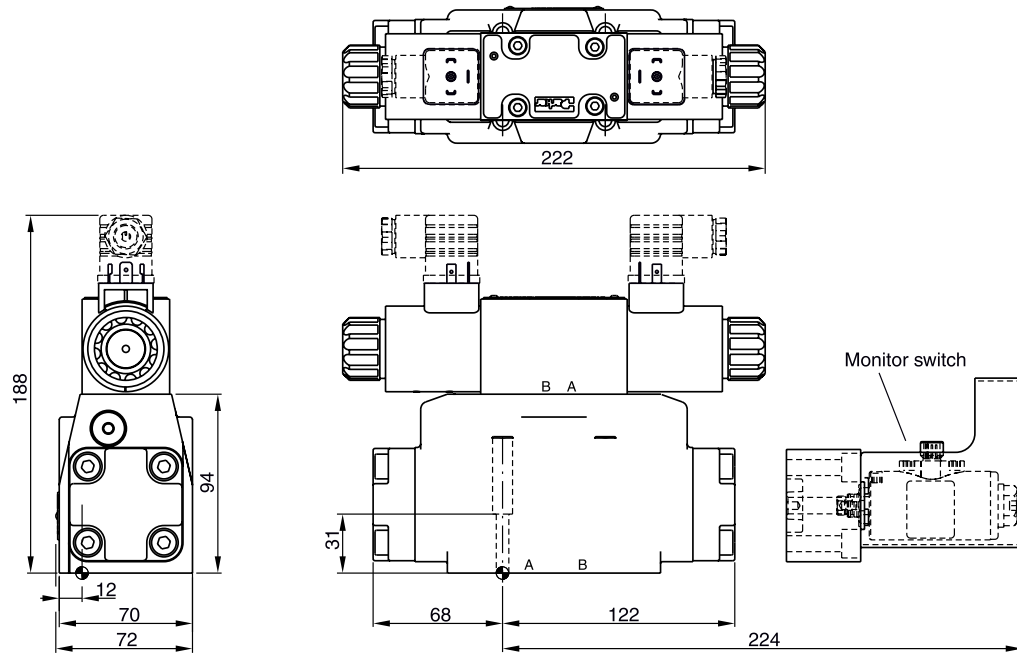

Regenerative and hybrid function with additional plate "H10-1666L / H10-1662 / A10-1664 / A10-1665L", see chapter 12.


Surface finish	Kit	Kit	Kit	Kit
	BK385	4x M6x40 ISO 4762-12.9	13.2 Nm ±15 %	NBR: SK-D31FB FPM: SK-D31FB-V

**D41FB**

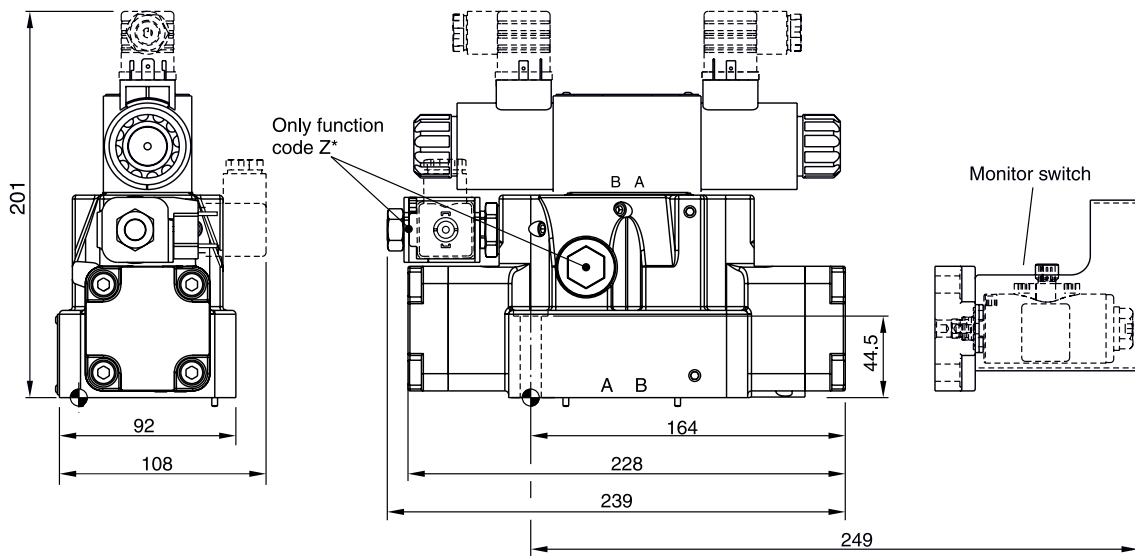


Surface finish	Kit	Kit	Kit	Kit
	BK320	2x M6x55 4x M10x60 ISO 4762-12.9	13.2 Nm ±15 % 63 Nm ±15 %	NBR: SK-D41FB FPM: SK-D41FB-V

**D91FB**

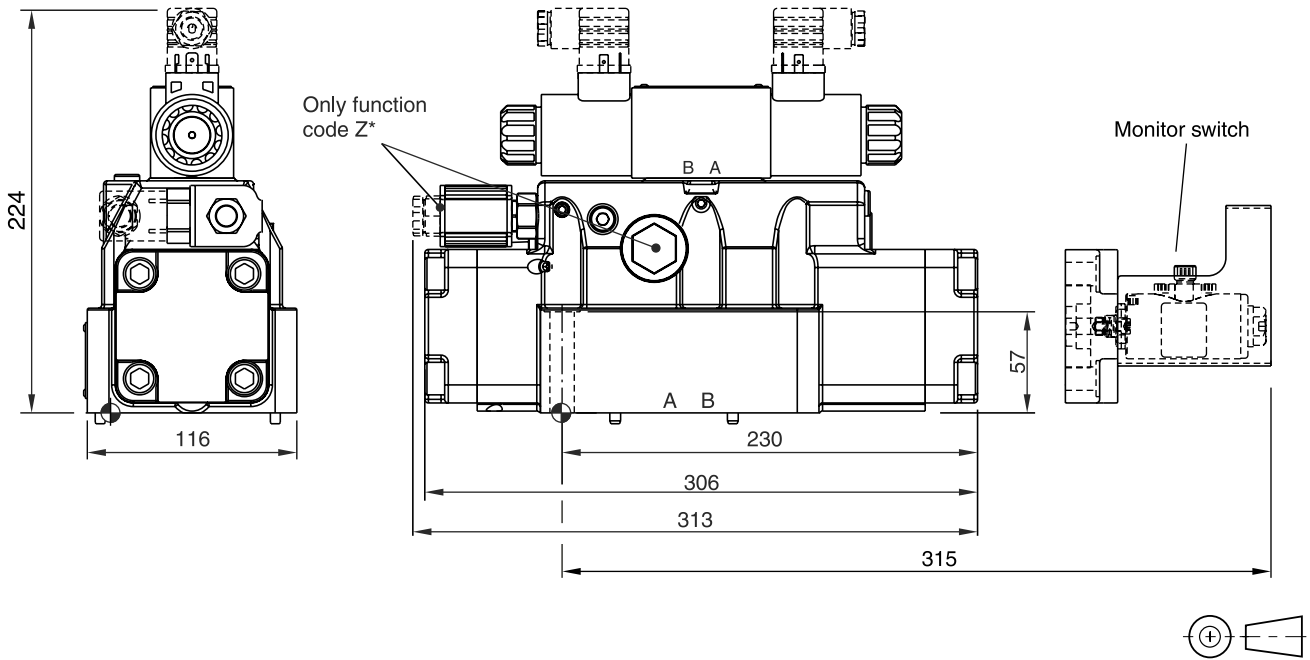


Surface finish	Kit	Kit	Kit	Kit
	BK360	6x M12x75 ISO 4762-12.9	108 Nm ±15 %	NBR: SK-D91FB FPM: SK-D91FB-V

**D111FB**

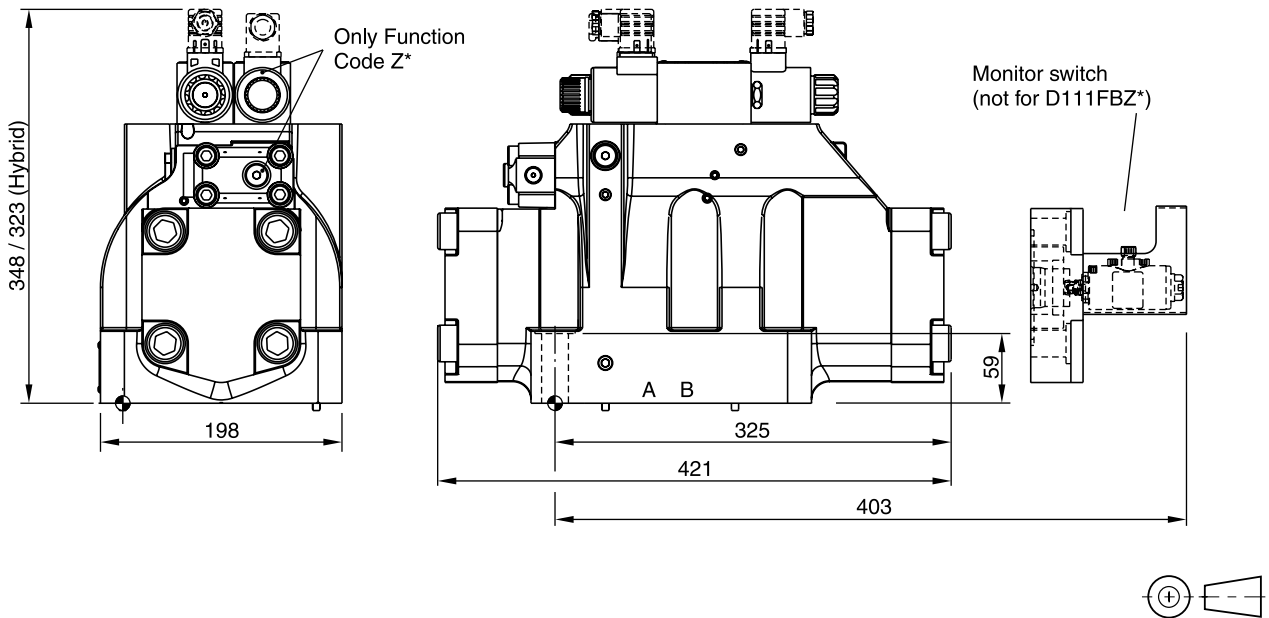

Surface finish	Kit	Kit	Kit	Kit
	BK386	6x M20x90 ISO 4762-12.9	517 Nm ±15 %	NBR: SK-D111FB FPM: SK-D111FB-V


**Dimension with DT04-2P "Deutsch" Connector**

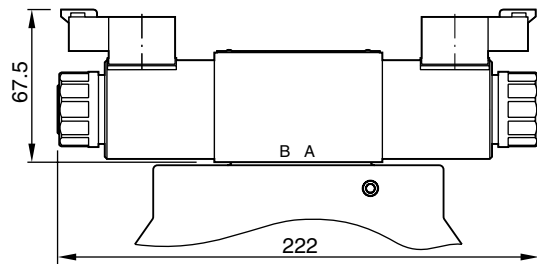

**3**

**D31FB OBE**


**3**

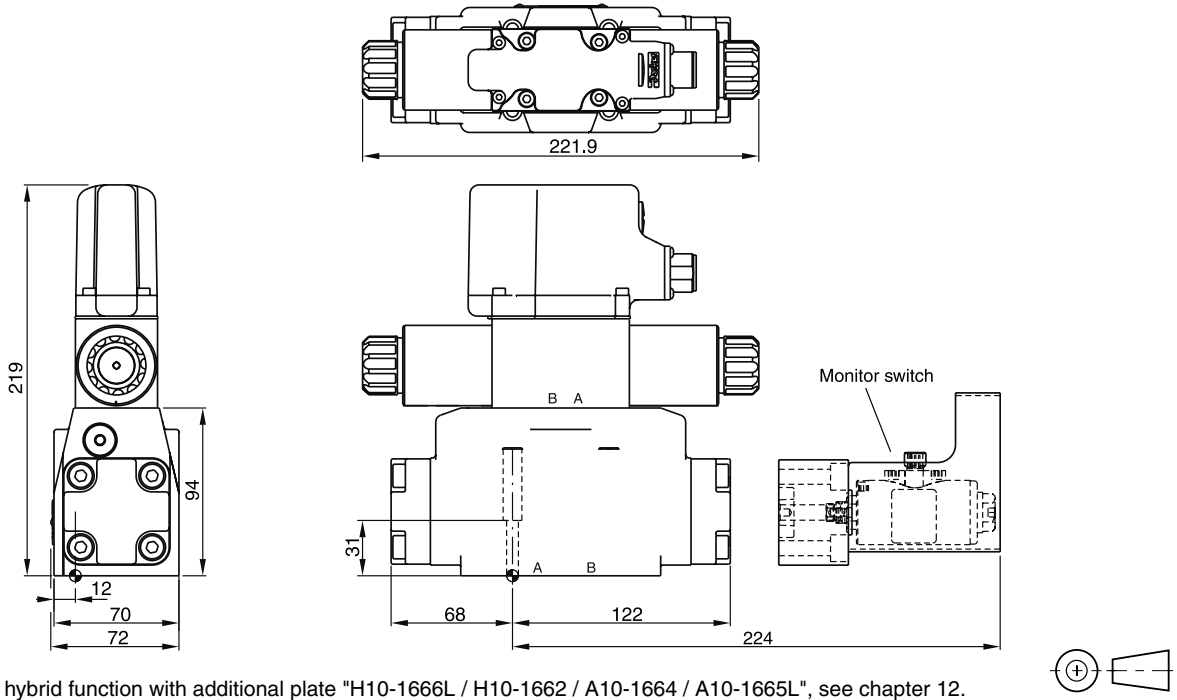

Regenerative and hybrid function with additional plate "H10-1666L / H10-1662 / A10-1664 / A10-1665L", see chapter 12.


Surface finish	Kit	Kit	Kit	Kit
	BK385	4x M6x40 ISO 4762-12.9	13.2 Nm ±15 %	NBR: SK-D31FB FPM: SK-D31FB-V

**D41FB OBE**

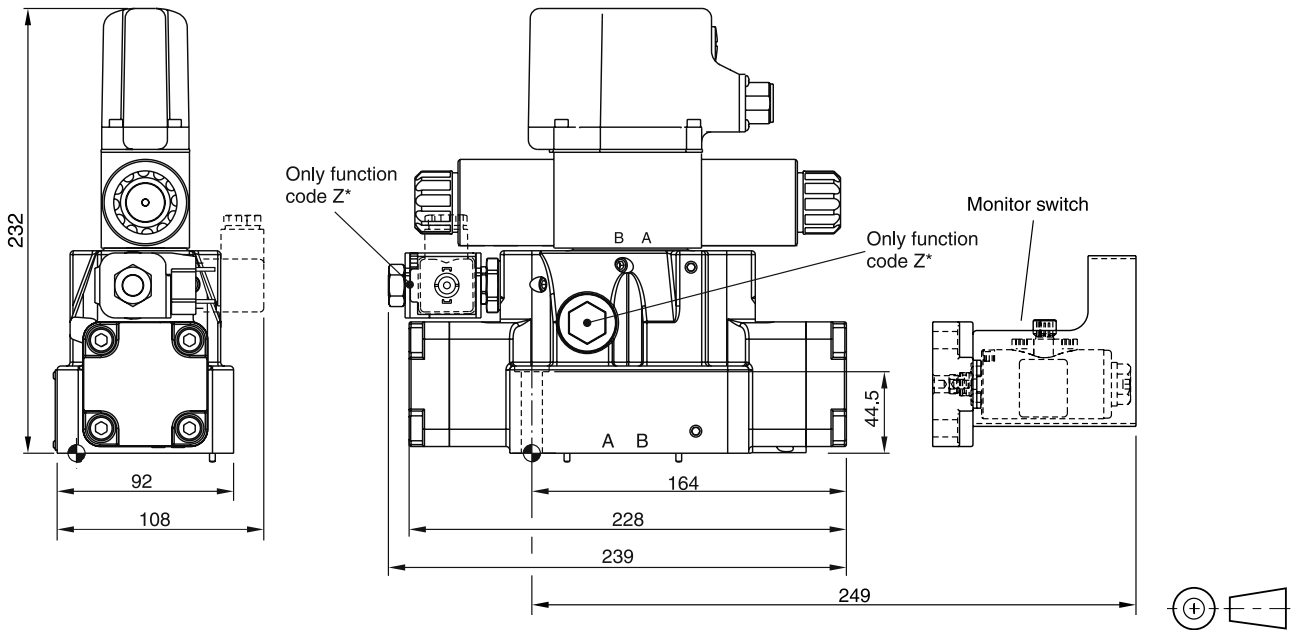


Surface finish	Kit	Kit	Kit	Kit
	BK320	2x M6x55 4x M10x60 ISO 4762-12.9	13.2 Nm ±15 % 63 Nm ±15 %	NBR: SK-D41FB FPM: SK-D41FB-V

**D91FB OBE**

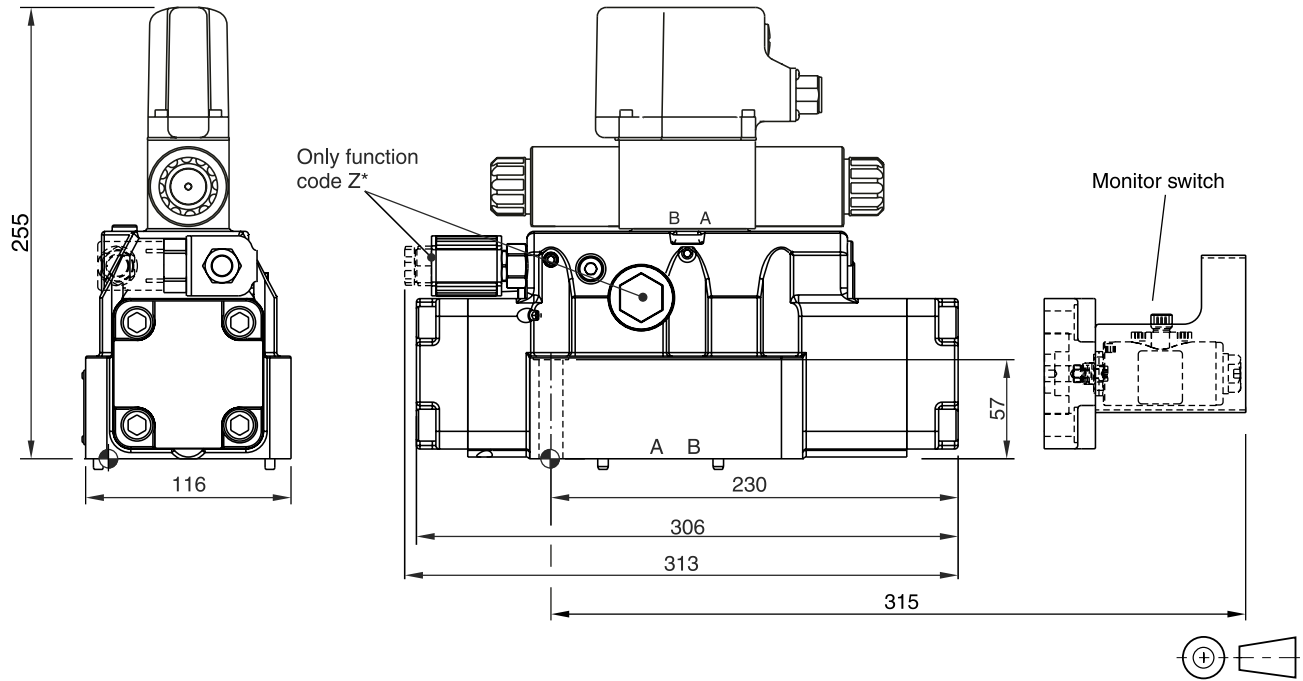

Surface finish	Kit	Kit	Kit	Kit
	BK360	6x M12x75 ISO 4762-12.9	108 Nm ±15 %	NBR: SK-D91FB FPM: SK-D91FB-V

**D111FB OBE**

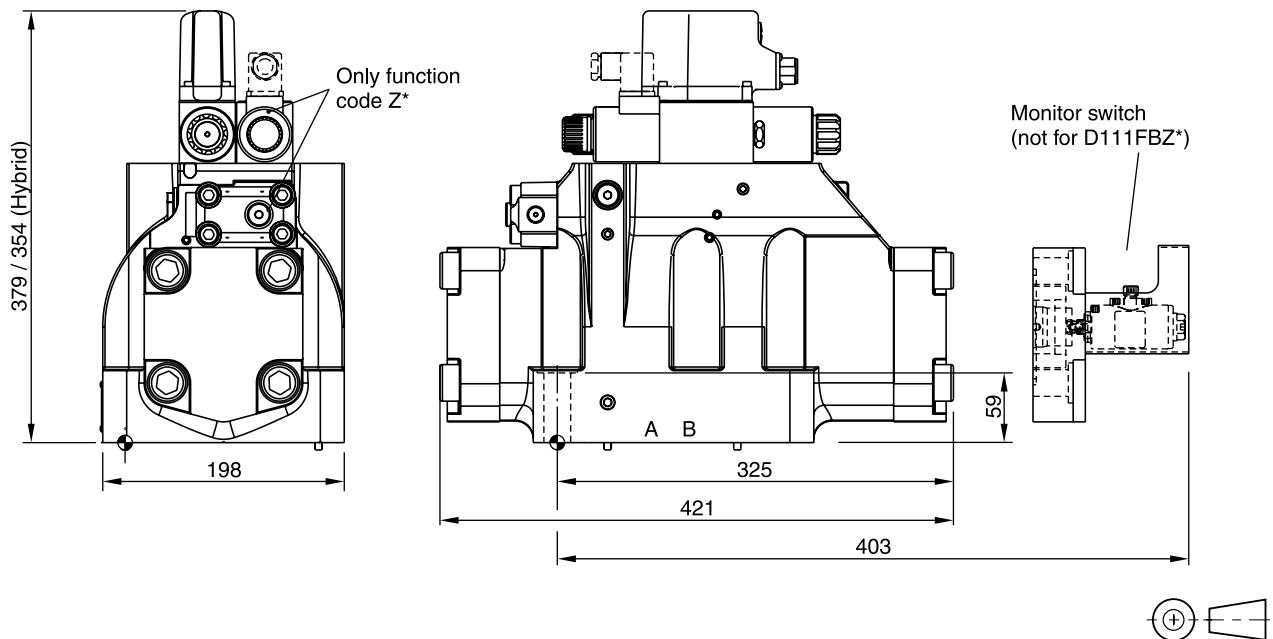

Surface finish	Kit	Kit	Kit	Kit
	BK386	6x M20x90 ISO 4762-12.9	517 Nm ±15 %	NBR: SK-D111FB FPM: SK-D111FB-V